

PRODUCT RANGE



ALAMARIN-JET
GO WITH THE FLOW

CONTENT

ALAMARIN-JET NETWORK 4

WATERJETS

AJ 160..... 6

The AJ 160 is the smallest jet in the Alamarin-Jet range, with the majority of applications in luxury pleasure tenders and small commercial vessels. AJ 160 is the only commercially rated waterjet of its size available and as with all Alamarin-Jet products there are no limits on operational profiles.

AJ 180/185..... 8

The AJ 180 and AJ 185 are often used in both leisure and commercial applications, with the majority of applications in luxury pleasure tenders and small commercial vessels, often requiring SOLAS certification. As with all Alamarin-Jet products there are no limits on operational profiles.

AJ 230 10

The AJ 230 is the best selling Alamarin-Jet product of all time, it is now the industry standard for SOLAS Fast Rescue Craft and is renown world wide for its extremely robust and simply design while maintaining high cavitation limits with high speed vessel performance.

AJ 245..... 12

The AJ 245 is the first jet in the COMBI-FRAME series. The patented Combi-Frame technology allows designers, builders and owners maximum flexibility when locating the position of the propulsion system within the vessel.

AJ 285 14

The AJ 285 is the newest jet in the COMBI-FRAME series. Choosing between 2 different hull installation inserts allows the jet to be installed either in LONG TAIL or SHORT TAIL configuration. Following the success of AJ 245 many customers requested the combi-frame installation method for larger, more powerful vessels. AJ 285 is suitable for engines up to 500HP.

AJ 340 16

The AJ 340 is a lightweight, compact and highly efficient commercial waterjet. Cavitation limits are the highest in class due to Alamarin-Jets leading hydrodynamic design, without reducing top speed capabilities. AJ 340 is suitable for large military and commercial fast craft, as well as pleasure craft applications.

AJ Q42..... 18

The Q42 is the first model in the Alamarin-Jet OMEGA SERIES, with a max input power of 2040HP.



CONTROL SYSTEMS

AJ ACU..... 20

The Actuator Control Unit System or ACU System is a modular propulsion control system designed to be adaptable for multiple configurations with simple selection of modular components.

AJ SIGMA CONTROLS..... 22

Alamarin-Jet SIGMA Control is an electro-hydraulic integrated drive-by-wire control system. It supports installations from single to quadruple waterjets.

ALAMARIN-JET NETWORK

Alamarin-Jet Oy are world leading manufacturers of waterjet propulsion units and controls systems. Suitable for input power up to 1500 kW / 2040 HP, Alamarin-Jet are renowned for an innovative, robust and efficient design philosophy.

Alamarin-Jet have been pushing waterjet innovation particularly in the last 10 years introducing technical features such as the patented Combi-Frame, a jet frame design which allows for multiple installation methods in AJ 245 and AJ 285 as well as the patented Dual Angle Shaft recently introduced in the OMEGA SERIES jets which allows 2 different shaft angles without changing jet inclination. Alamarin-Jet see the importance in future technologies within the marine industry and therefore have invested heavily in next generation control and monitoring systems, this includes fully autonomous operations, remote surveillance and remote monitoring. All built on the SIGMA CONTROLS platform.

A RELIABLE AND SKILLED DEALER NETWORK COVERS 50+ COUNTRIES ALL AROUND THE WORLD, PROVIDING RAPID RESPONSE AND DELIVERING SERVICE AND SPARE PARTS WHEN NEEDED THE MOST. ALAMARIN-JET CONSTANTLY WORK ON DEVELOPING THE NETWORK IN ORDER TO MAINTAIN HIGHEST POSSIBLE LEVEL OF SALES AND SUPPORT.

ALMOST 50 YEARS SUCCESSFUL EXPERIENCE IN DESIGNING, MANUFACTURING, AND SUPPLYING WATERJET PROPULSION SYSTEMS AROUND THE WORLD

FINNISH QUALITY. OVER 90% MADE IN FINLAND, 10% REMAINING EUROPEAN UNION

BROAD RANGE OF JET SIZES SUITABLE FOR INPUT POWER UP TO 1,500 KW

BEST POWER/SIZE/WEIGHT CHARACTERISTICS IN THE MARKET

HIGHLY ACCURATE PERFORMANCE CALCULATIONS USING THE LATEST SOFTWARE COMBINED WITH YEARS OF EXPERIENCE


FASTEST PRODUCTION LEAD TIMES IN THE INDUSTRY

COMPANY DEDICATED TO SERVICE AND SUPPORT

DEALER/SERVICE NETWORK IN 50+ COUNTRIES

DIRECT FACTORY SUPPORT FOR ALL CUSTOMERS

AJ 160

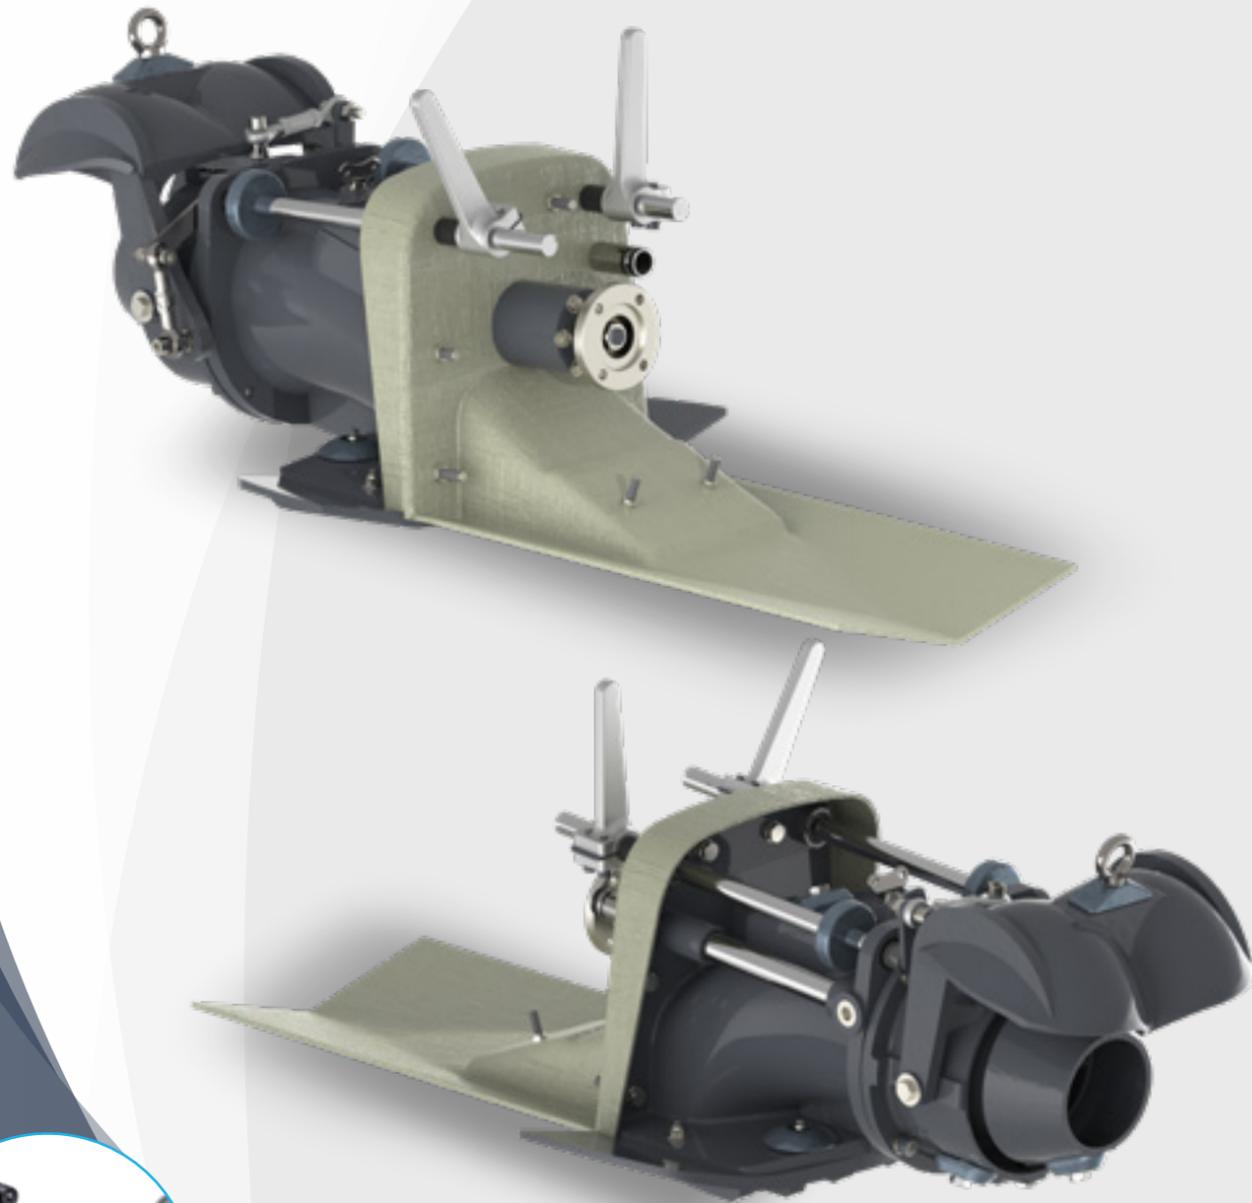

REVERSING DEFLECTOR CONTROL

SPECS



PUMP TYPE
MIXED FLOW,
SINGLE STAGE





IMPELLER SHAFT RPM
MAX. 5000 1/MIN



MAX. VESSEL DISPLACEMENT
1000 KG (2205 LBS)
PER JET UNIT
(PLANING VESSEL)



JET WEIGHT
38 KG
(84 LBS)

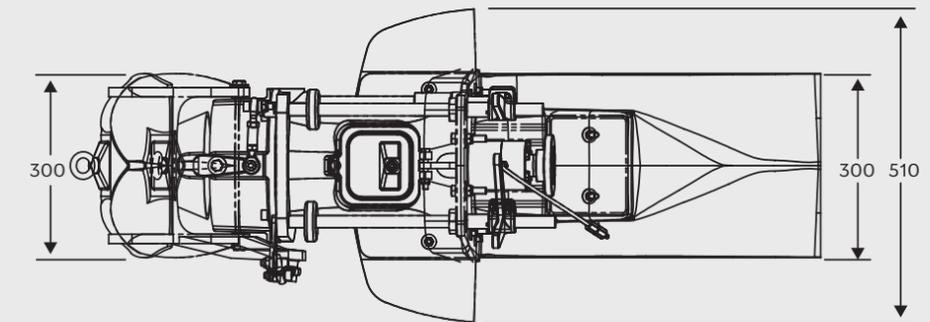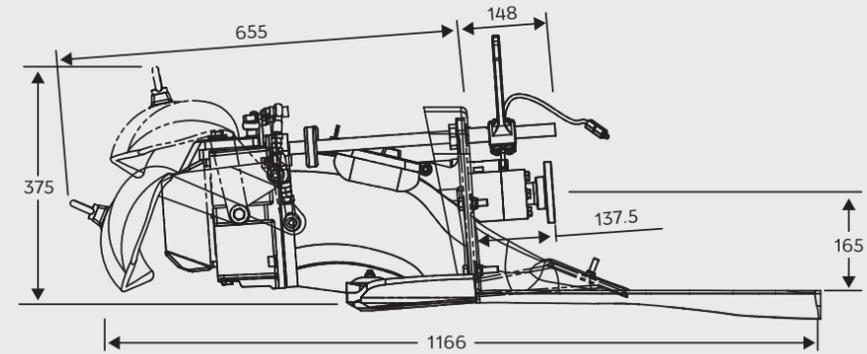

IMPELLER DIAMETER
MAX. 186 MM
(7.3")



MAX INPUT POWER
100 KW
(136 MHP)




JET CONSTRUCTION
ALUMINIUM,
STAINLESS STEEL




REVERSE DEFLECTOR CONTROL
MECHANICAL OR
ELECTRICAL (ACU)

AJ 160 POWER/RPM COVERAGE

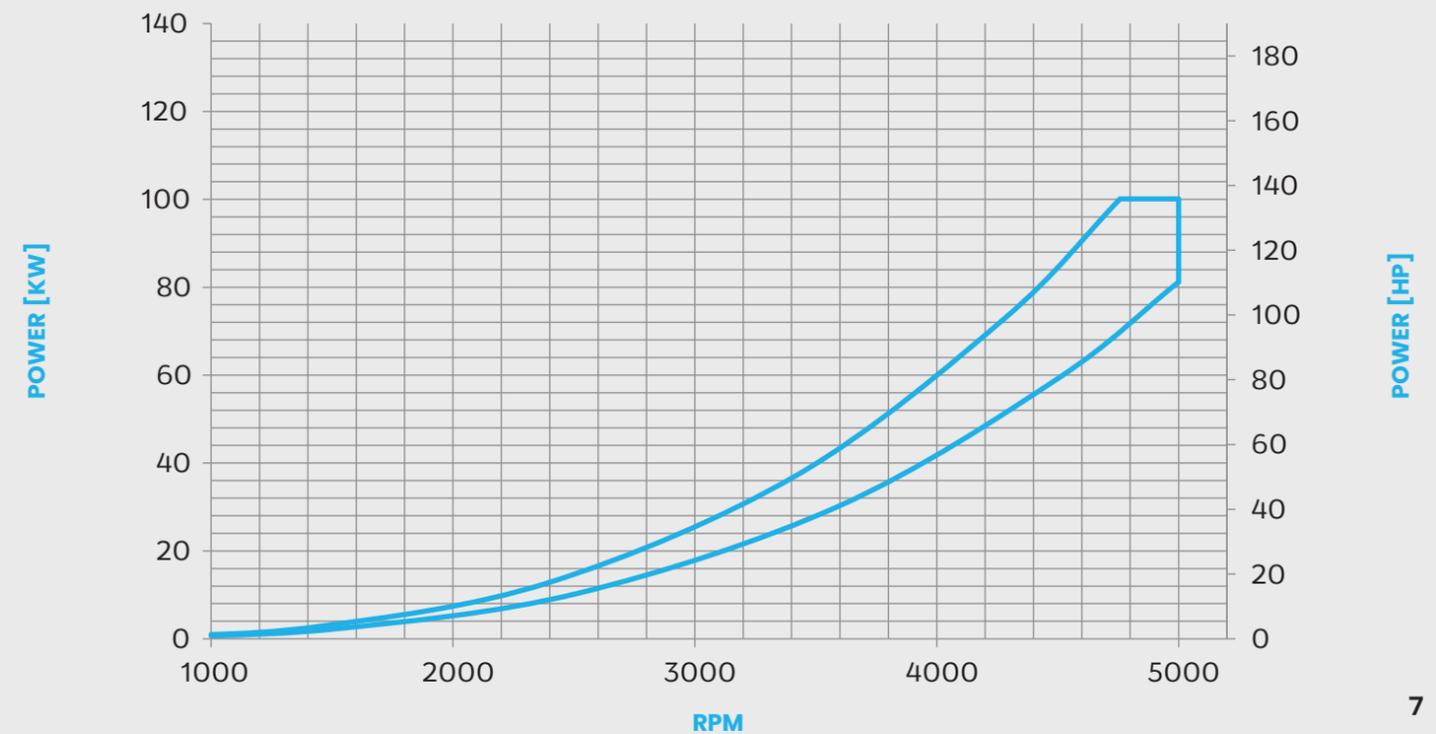

AJ 180/185

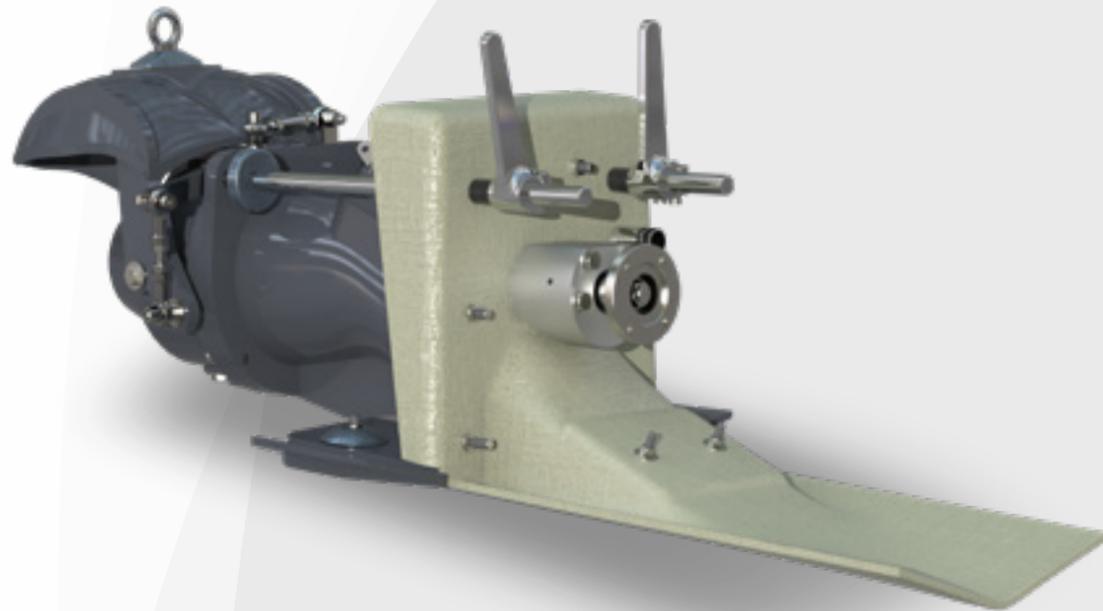

REVERSING
DEFLECTOR
CONTROL

SPECS



PUMP TYPE
MIXED FLOW,
SINGLE STAGE





IMPELLER SHAFT RPM
MAX. 5000 1/MIN



**MAX. VESSEL
DISPLACEMENT**
1700 KG (3700 LBS)
PER JET UNIT
(PLANING VESSEL)



JET WEIGHT
48 / 50 KG
(106 / 110 LBS)

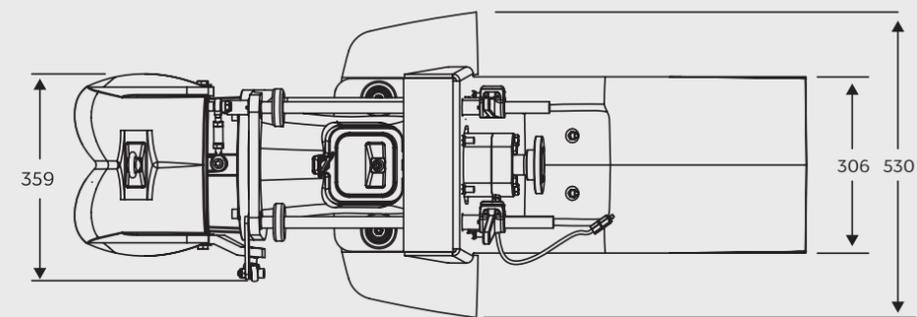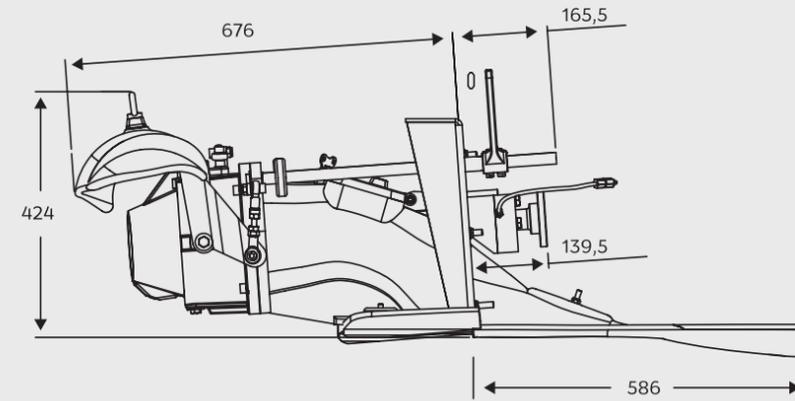

IMPELLER DIAMETER
MAX. 192 / 197 MM
(7.6" / 7.8")



MAX INPUT POWER
120 KW
(163 MHP)




JET CONSTRUCTION
ALUMINIUM,
STAINLESS STEEL




**REVERSE DEFLECTOR
CONTROL**
MECHANICAL OR
ELECTRICAL (ACU)

AJ 180/185 POWER/RPM COVERAGE

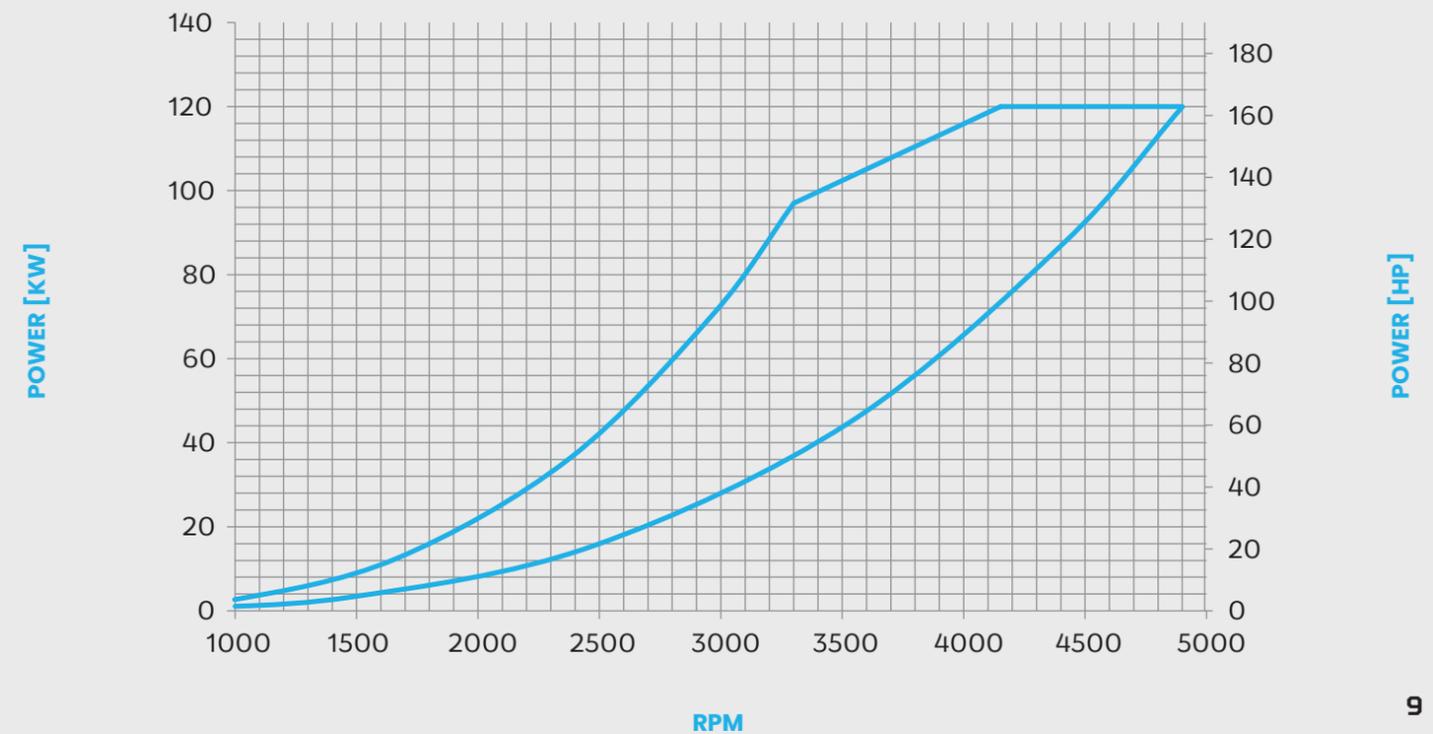

AJ 230

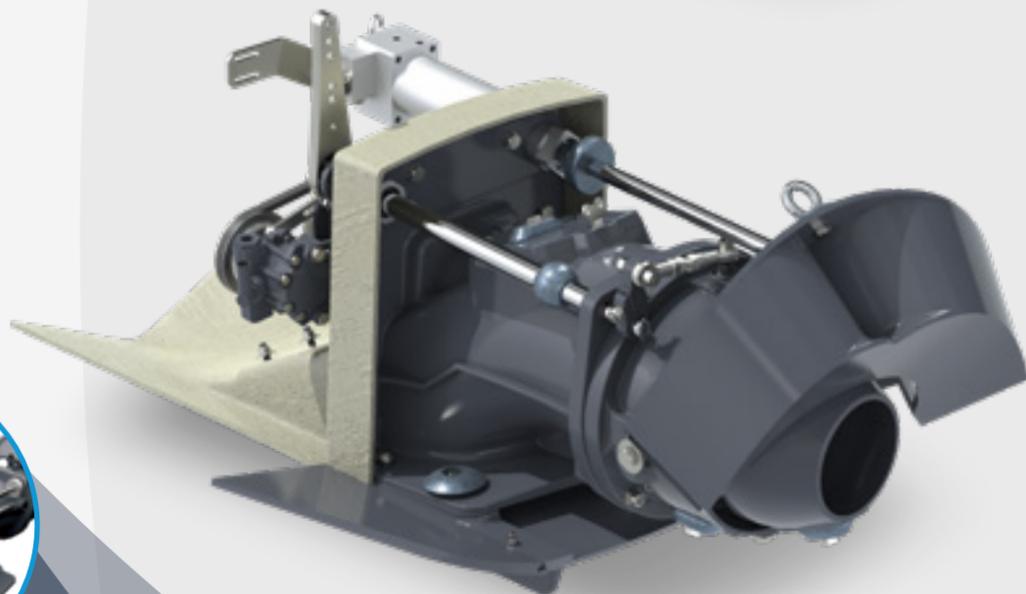

REVERSING
DEFLECTOR
CONTROL

SPECS



PUMP TYPE
MIXED FLOW





IMPELLER SHAFT RPM
MAX. 4600 1/MIN



**MAX. VESSEL
DISPLACEMENT**
3000 KG / 6 600 LBS



JET WEIGHT
81 KG / 179 LBS

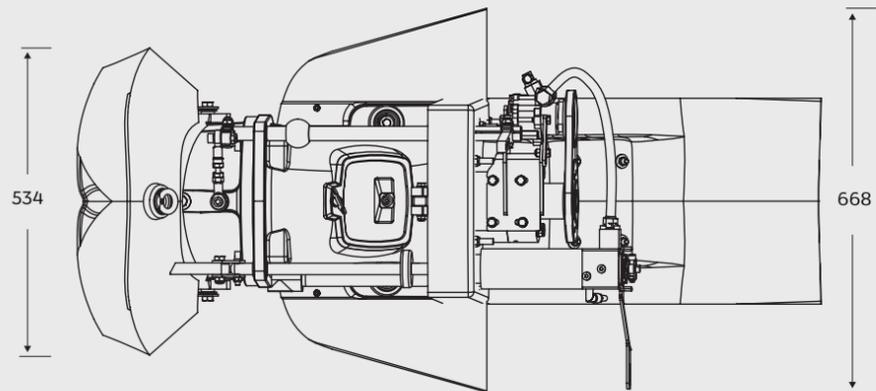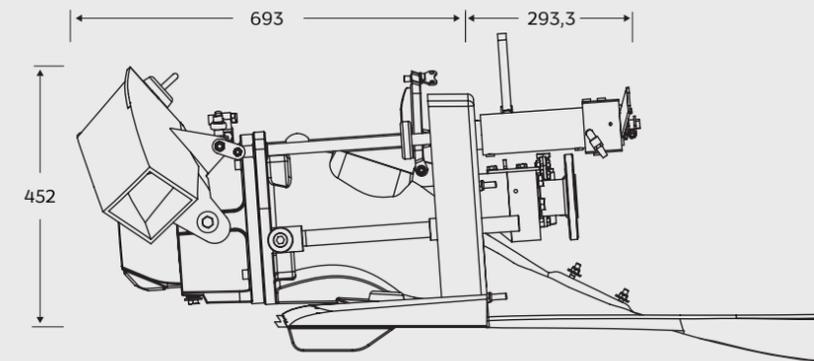

IMPELLER DIAMETER
MAX. 228 MM / 9"



MAX INPUT POWER
190 KW / 260 HP




JET CONSTRUCTION
ALUMINIUM,
STAINLESS STEEL




**REVERSE DEFLECTOR
CONTROL**
HYDRAULIC

AJ 230 POWER/RPM COVERAGE

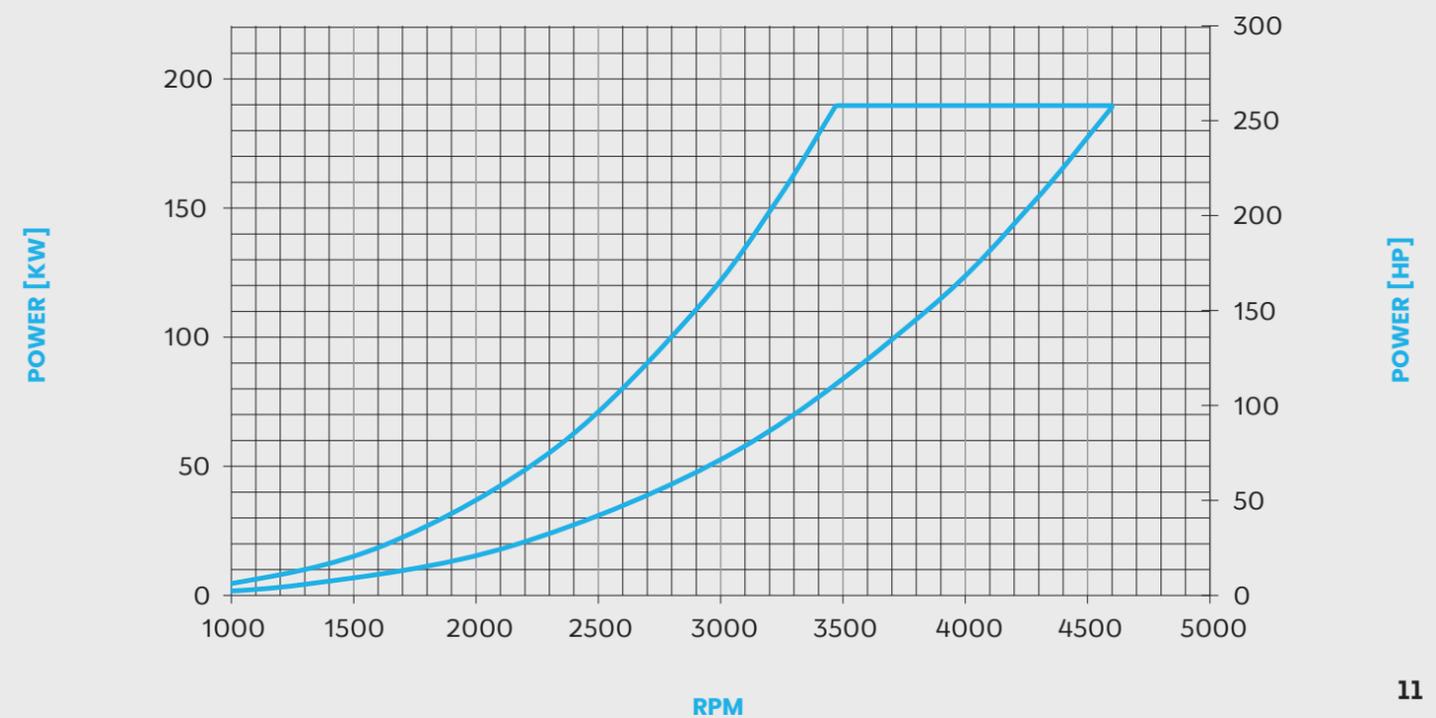

AJ 245

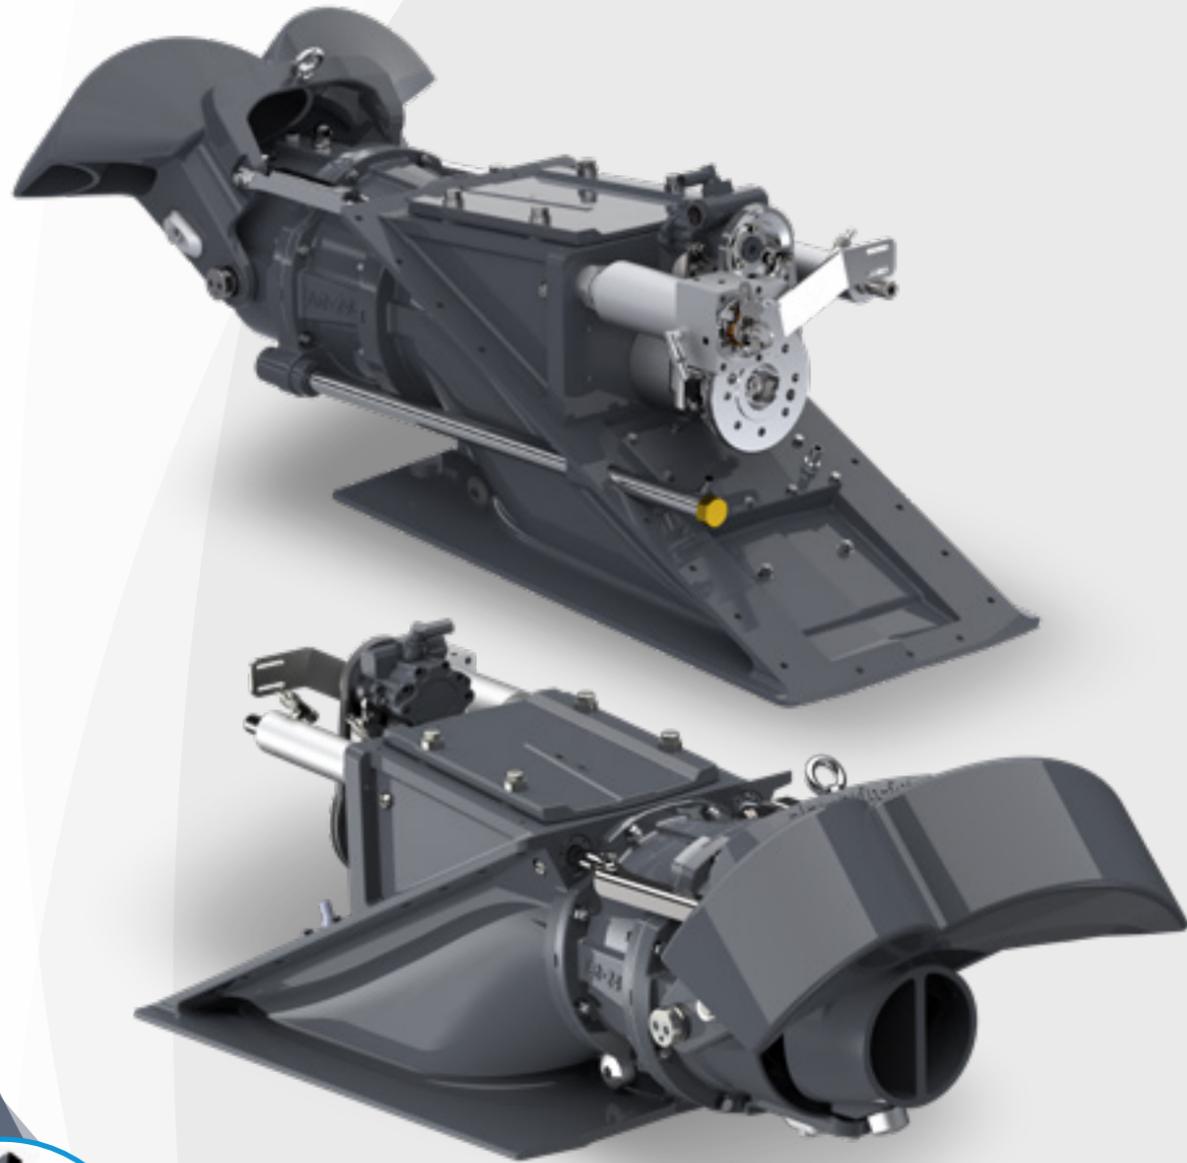

TWO INSTALLATION
OPTIONS

**PATENTED
COMBI-FRAME
TECHNOLOGY**

**Integrated
oil cooler
and steering
cylinder**

SPECS



PUMP TYPE
MIXED FLOW,
SINGLE STAGE




IMPELLER SHAFT RPM
MAX. 4600 1/MIN



**MAX. VESSEL
DISPLACEMENT**
3500 KG (7700 LBS)
PER JET UNIT
(PLANING VESSEL)



JET WEIGHT
95 KG
(209 LBS)

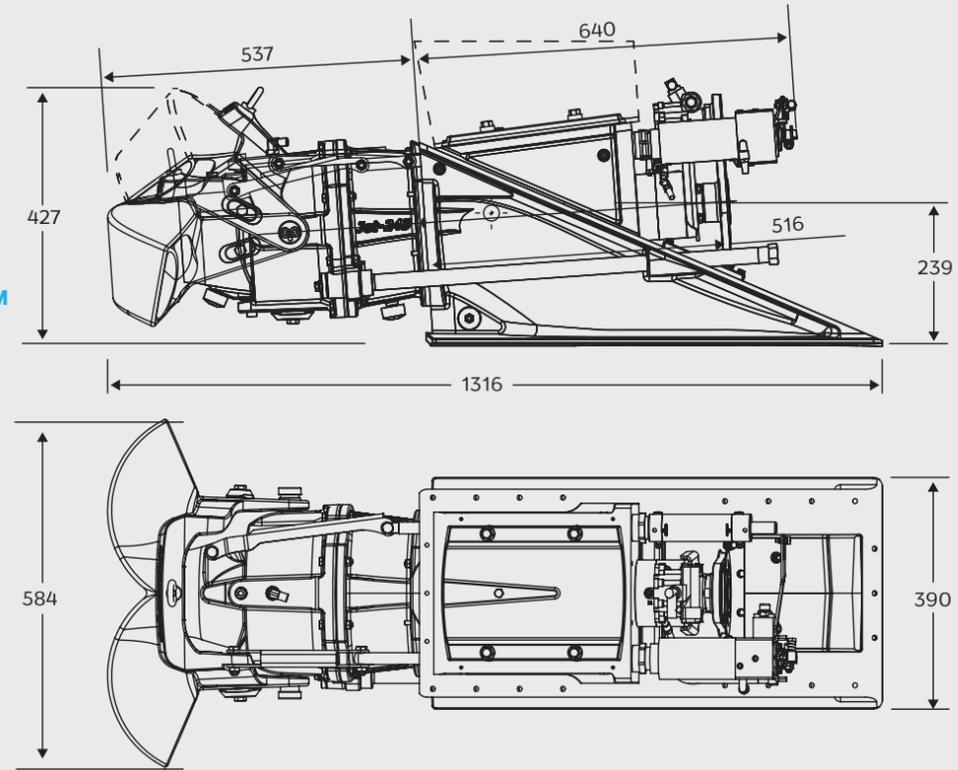

IMPELLER DIAMETER
MAX. 245 MM
(9.6")



MAX INPUT POWER
235 KW
(320 MHP)




JET CONSTRUCTION
ALUMINIUM,
STAINLESS STEEL





**REVERSE DEFLECTOR
CONTROL**
HYDRAULIC OR
SIGMA CONTROLS

AJ 245 POWER/RPM COVERAGE

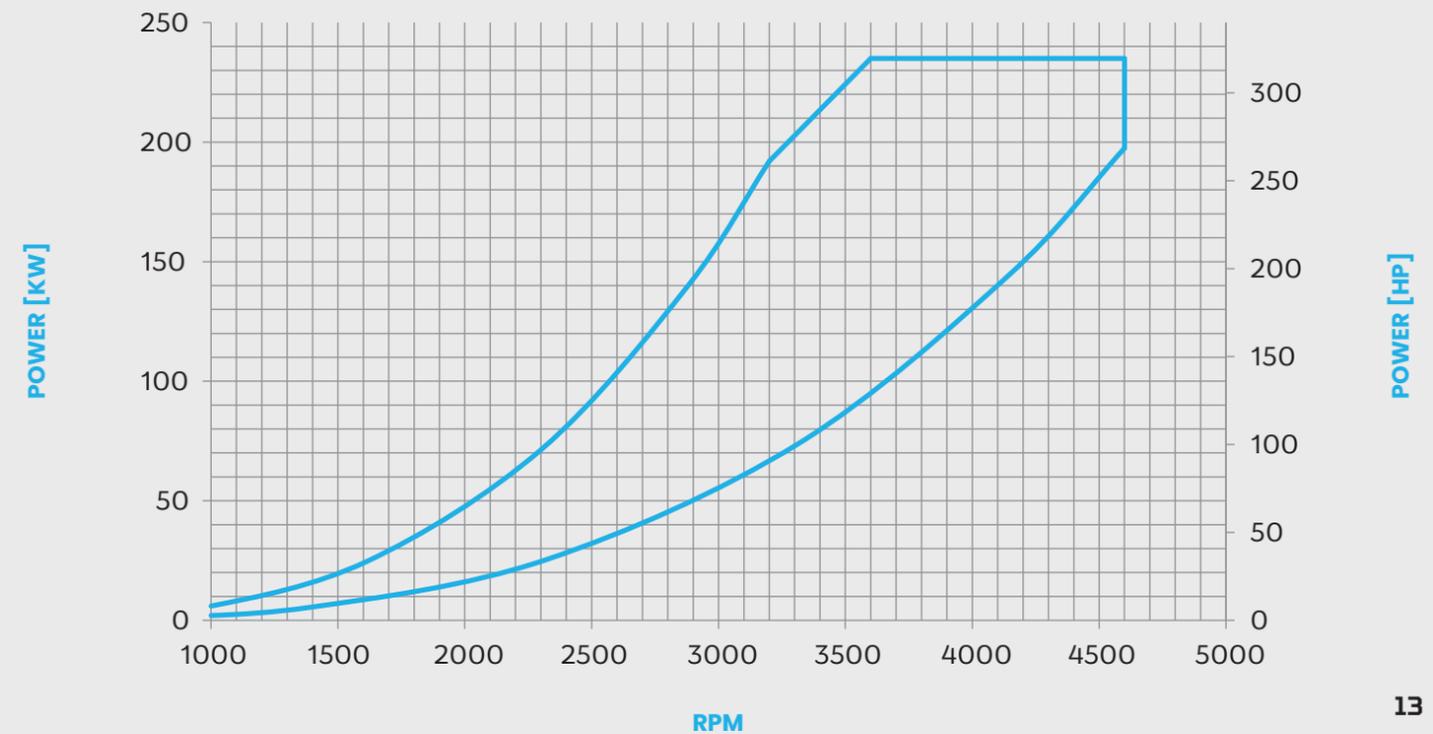

AJ 285

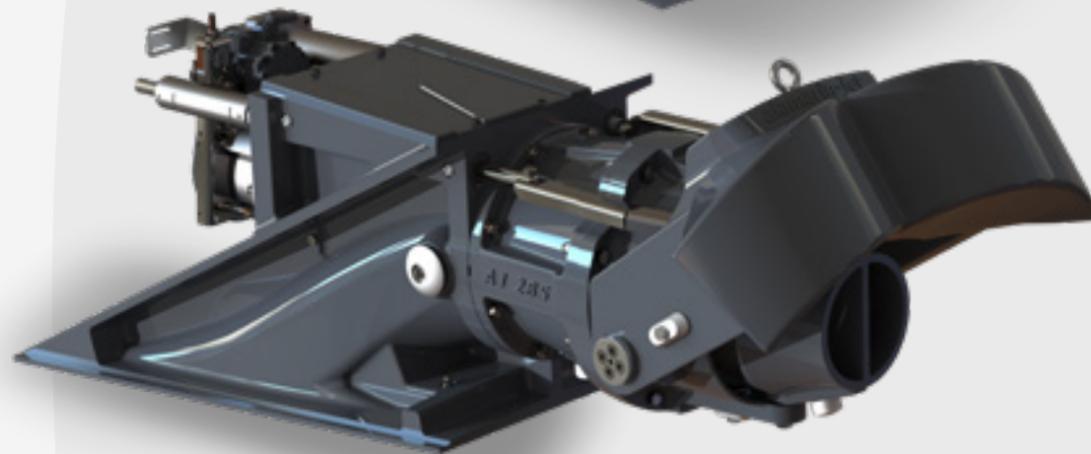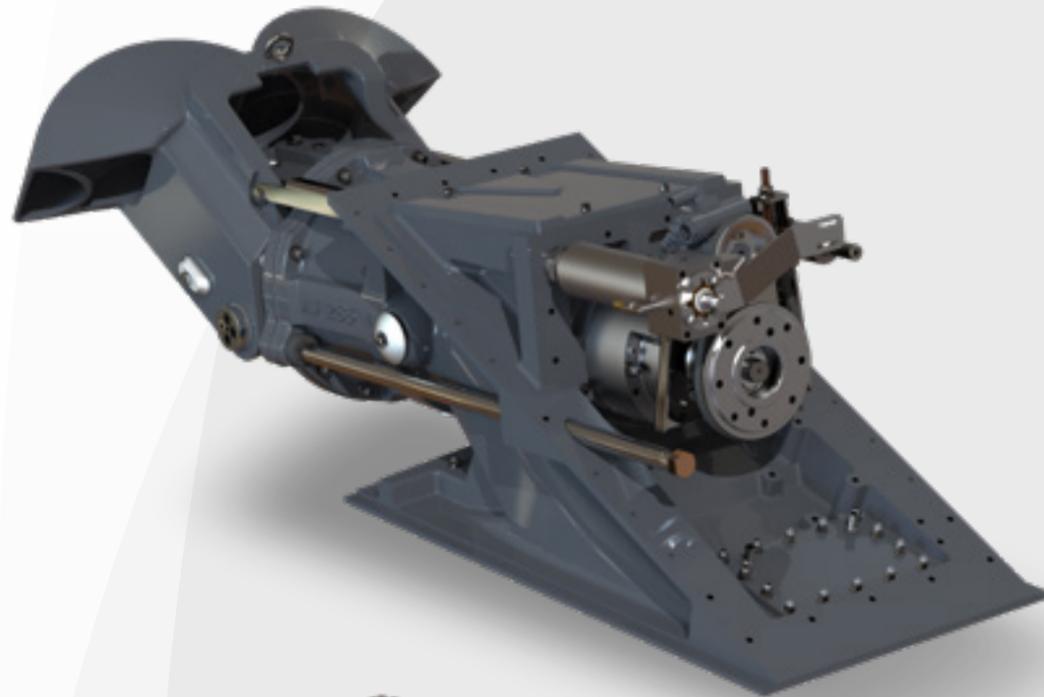

TWO INSTALLATION OPTIONS

PATENTED COMBI-FRAME TECHNOLOGY

Integrated oil cooler and steering cylinder

SPECS



PUMP TYPE
MIXED FLOW,
SINGLE STAGE





IMPELLER SHAFT RPM
MAX. 3700 1/MIN



MAX. VESSEL DISPLACEMENT
5000 KG (11 000 LBS)
PER JET UNIT
(PLANING VESSEL)



JET WEIGHT
181 KG
(399 LBS)

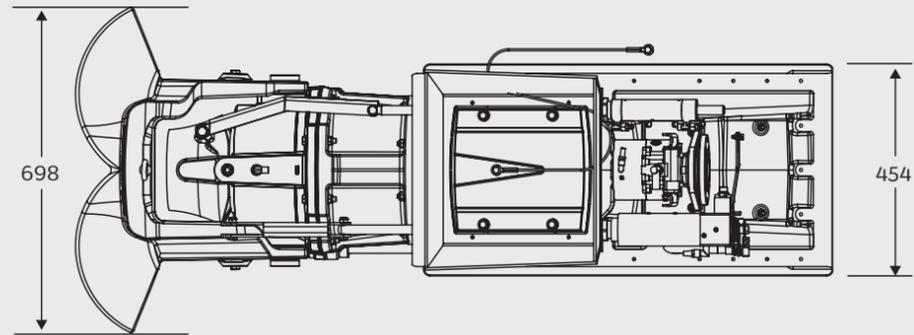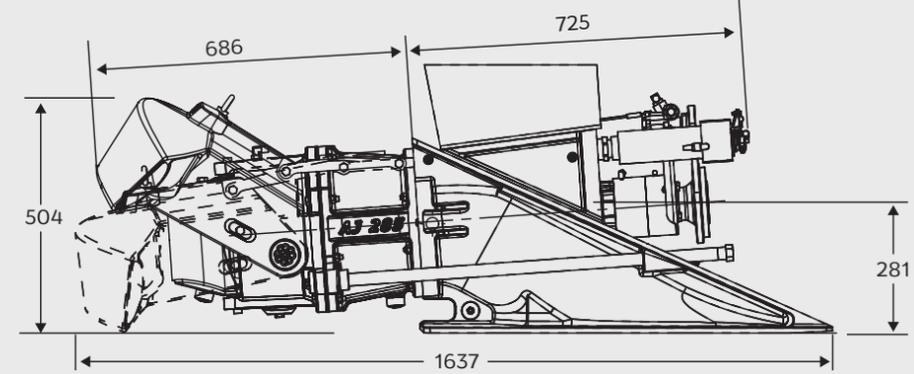

IMPELLER DIAMETER
MAX. 288 MM
(11.3")



MAX INPUT POWER
368 KW
(500 MHP)




JET CONSTRUCTION
ALUMINIUM,
STAINLESS STEEL



REVERSE DEFLECTOR CONTROL
HYDRAULIC OR
SIGMA CONTROLS

AJ 285 POWER/RPM COVERAGE

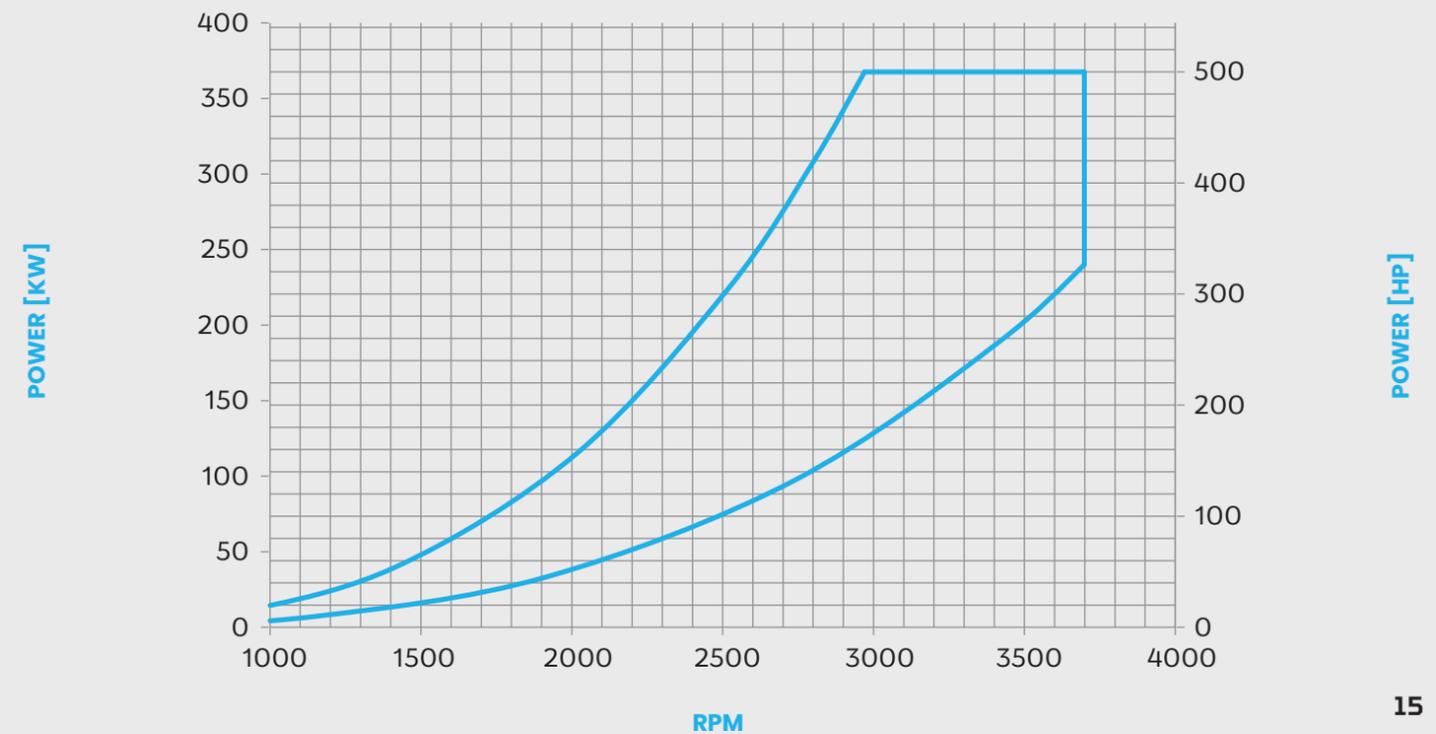

AJ 340



0-deg & 5-deg installation options

Integrated oil cooler

SPECS



PUMP TYPE
MIXED FLOW,
SINGLE STAGE





IMPELLER SHAFT RPM
MAX. 3300 1/MIN



MAX. VESSEL DISPLACEMENT
7500 KG (16 535 LBS)
PER JET UNIT
(PLANING VESSEL)



JET WEIGHT
245 KG
(540 LBS)

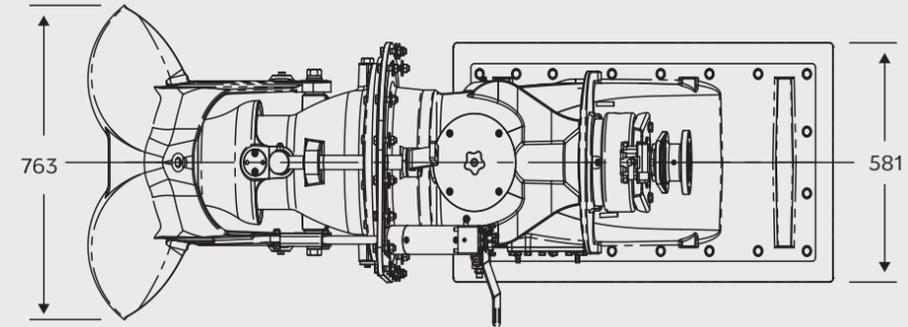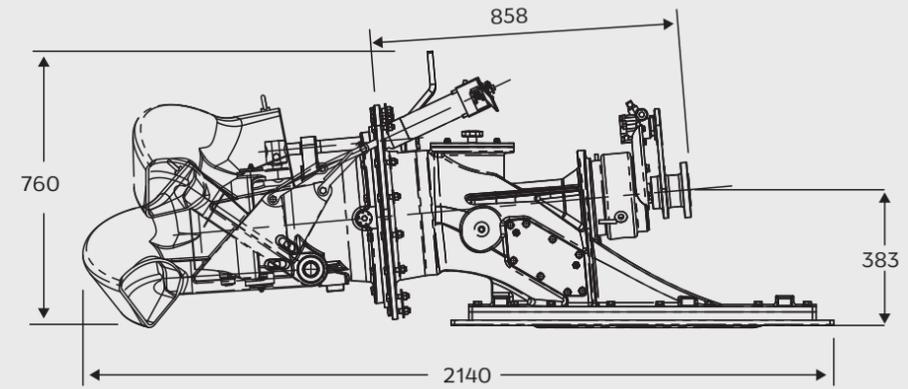

IMPELLER DIAMETER
MAX. 335 MM
(13.2")



MAX INPUT POWER
550 KW
(750 MHP)




JET CONSTRUCTION
ALUMINIUM,
STAINLESS STEEL



REVERSE DEFLECTOR CONTROL
HYDRAULIC OR
SIGMA CONTROLS

AJ 340 POWER/RPM COVERAGE

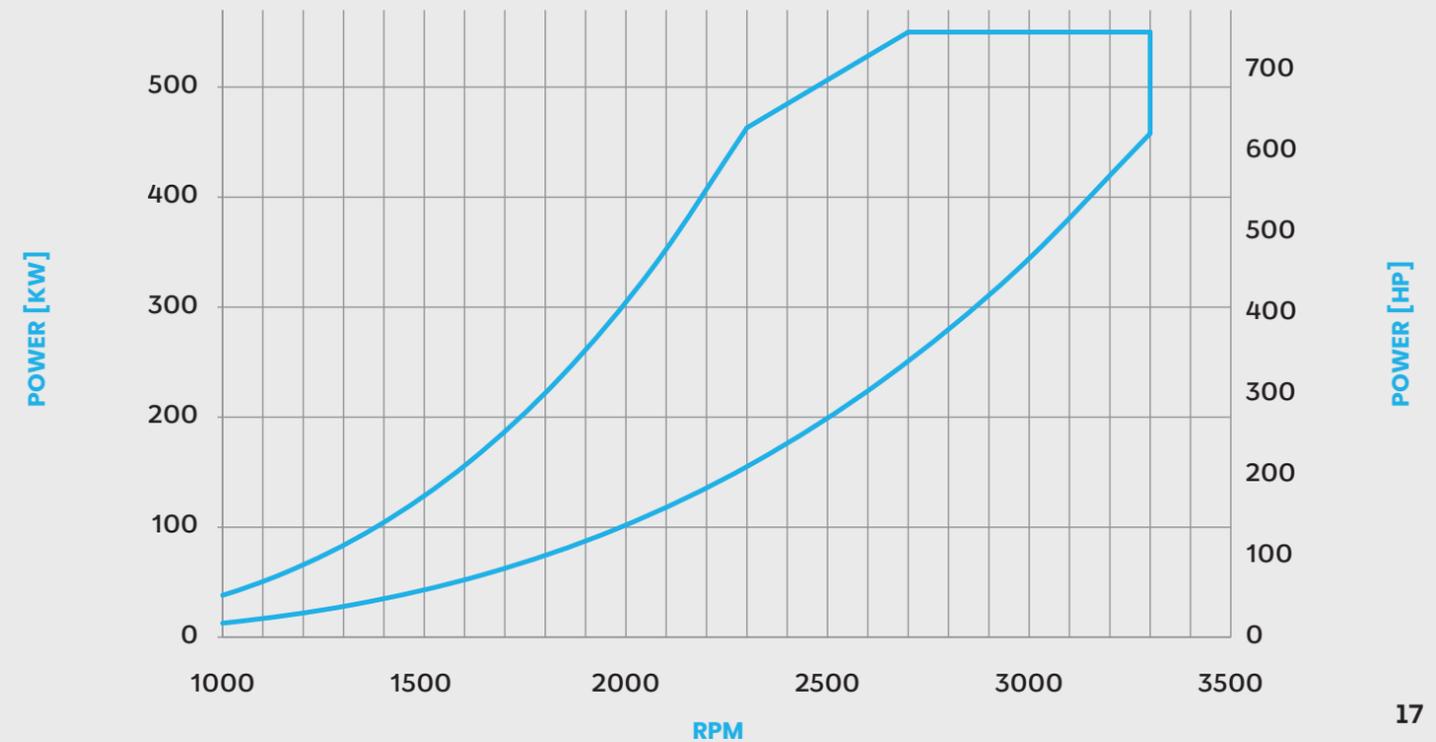

A Ω 42



DAS:
0-deg & 4-deg
shaft options

**Integrated
SIGMA
controls**

FIBS:
Frame
Integrated
Bearing
Structure

MIG:
Modular Intake
Geometry

SPECS



PUMP TYPE
MIXED FLOW,
SINGLE STAGE





IMPELLER SHAFT RPM
MAX. 2300 1/MIN



**MAX. VESSEL
DISPLACEMENT**
24 000 KG (53 000 LBS)
PER JET UNIT
(PLANING VESSEL)



JET WEIGHT
815 KG
(1796 LBS)

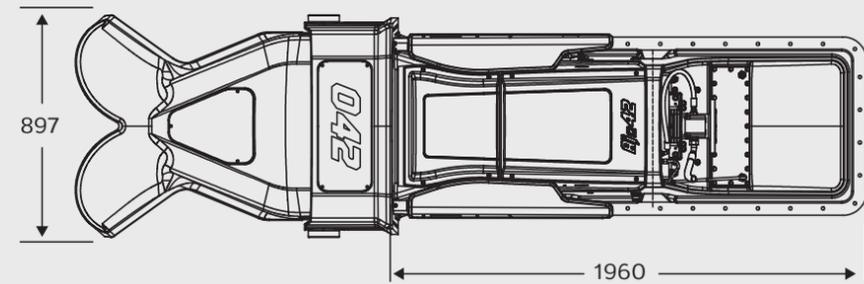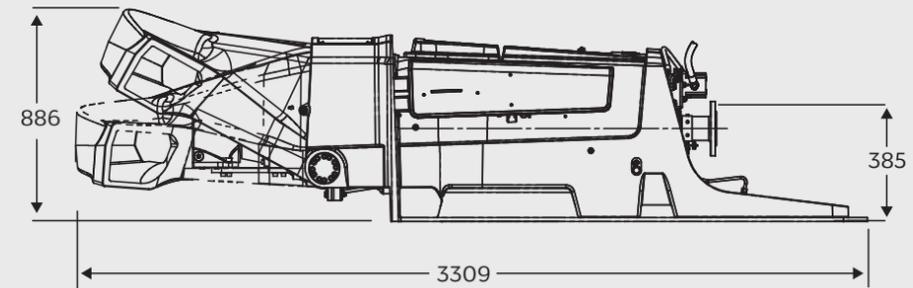

IMPELLER DIAMETER
MAX. 480MM
(18.9")



MAX INPUT POWER
1500 KW
(2040 HP)




JET CONSTRUCTION
ALUMINIUM,
STAINLESS STEEL



**REVERSE DEFLECTOR
CONTROL**
HYDRAULIC OR
SIGMA CONTROLS

AJ OMEGA 42 POWER/RPM COVERAGE

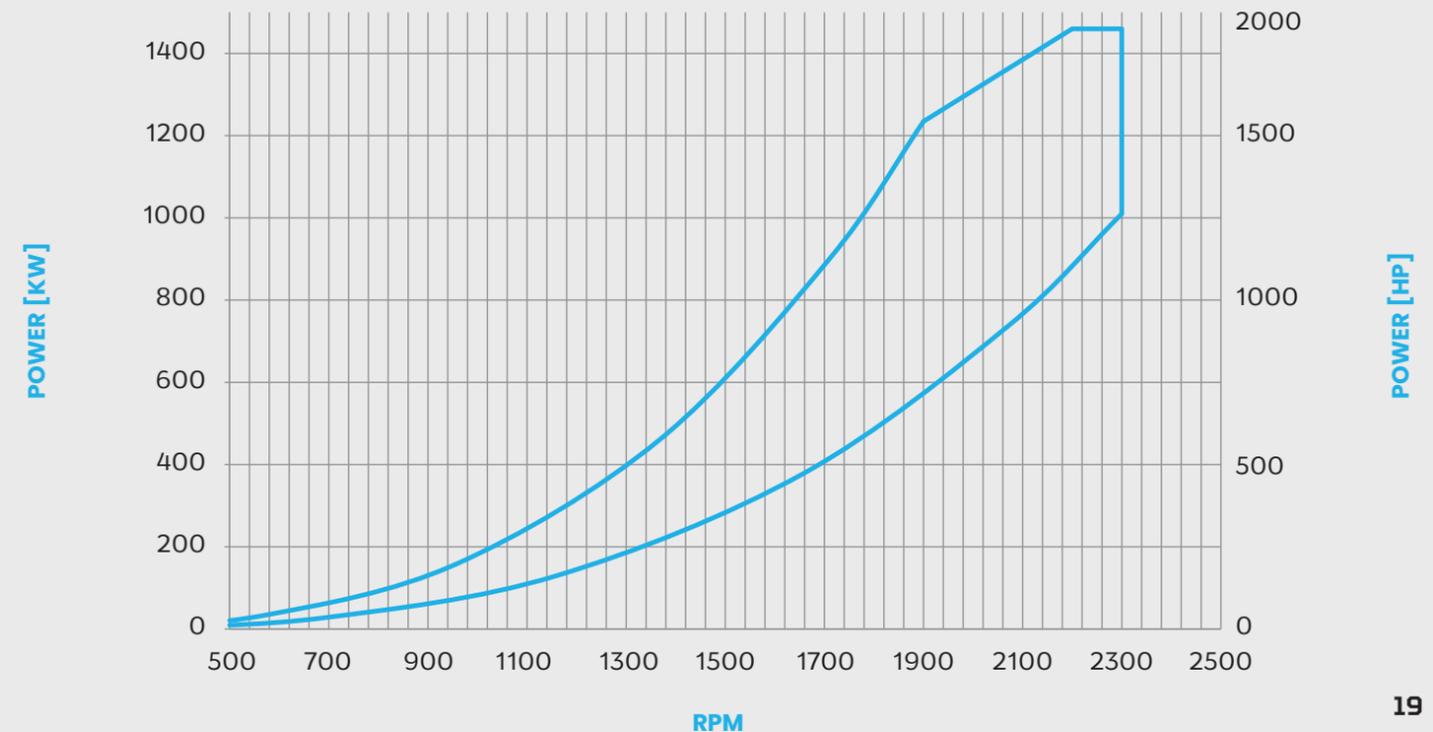

AI ACU

The Actuator Control Unit System or ACU System is a modular propulsion control system designed to be adaptable for multiple configurations with simple selection of modular components.

The ACU system can be used to control the waterjet deflector(s), as well as engine throttle and gearbox engagement.




The main unit in the system is the ACU itself.

The ACU is a controller box which can be connected to 3 different actuators depending on its role within the overall system.

The ACU can accept an analogue voltage signal (typically 0-5v), a CAN signal, or a mechanical input from Morse cable via the built in potentiometer.


The ACU can be configured via the integrated button and 'traffic light' LED's or via ACU Service tool available for mobile platforms.

ACU Service Tool (mobile app)

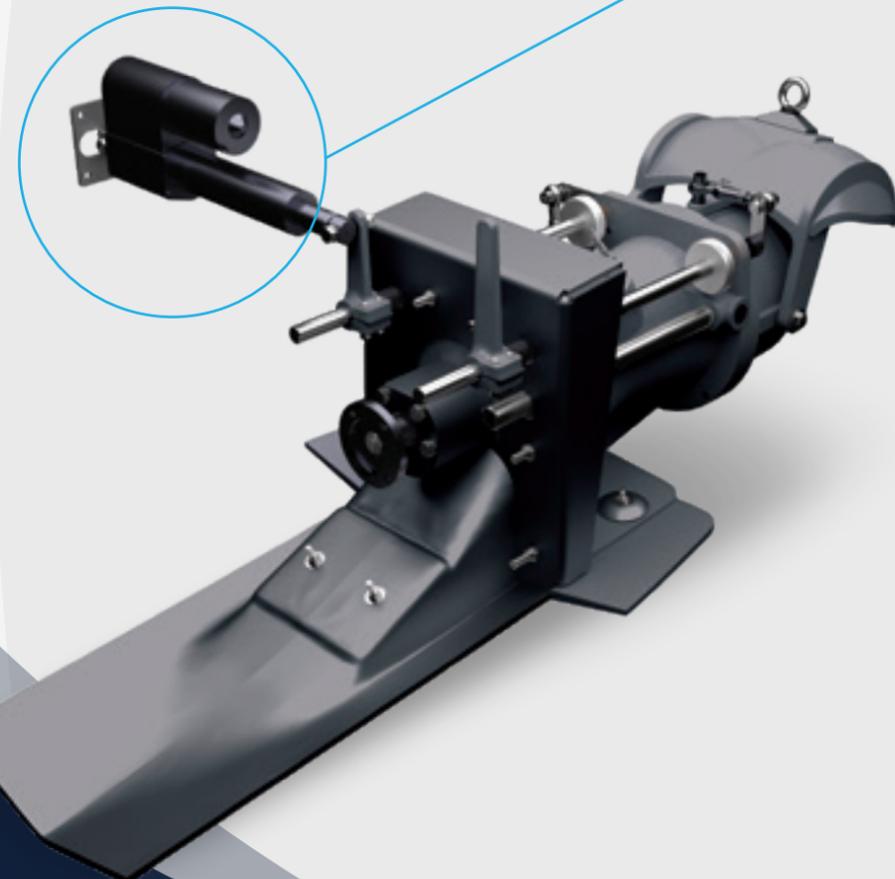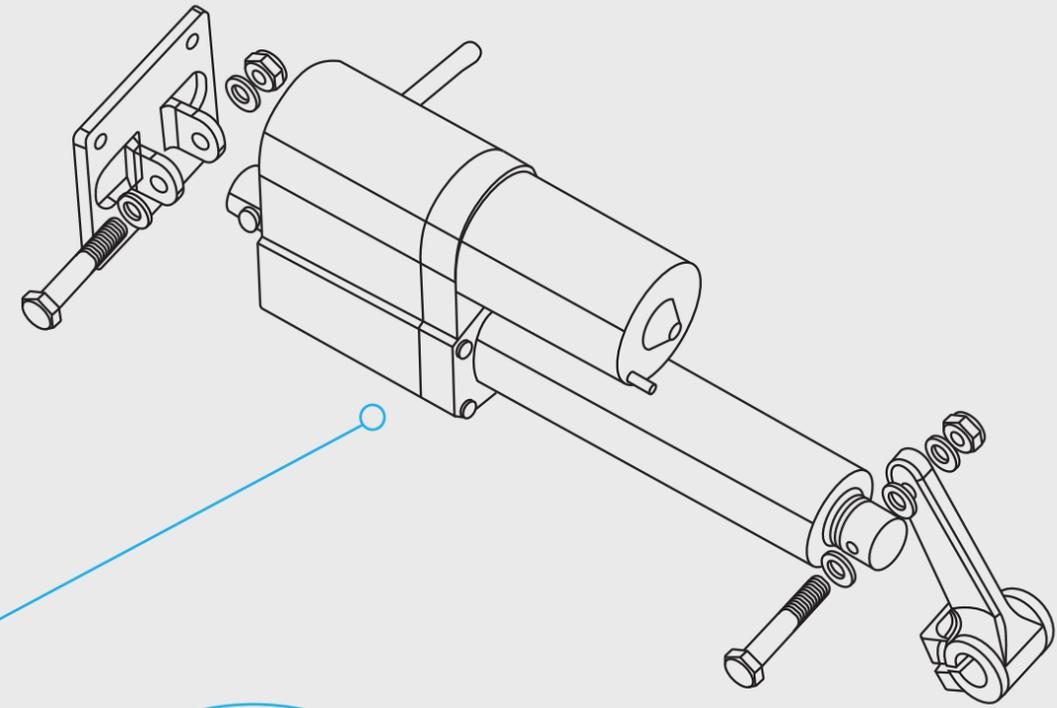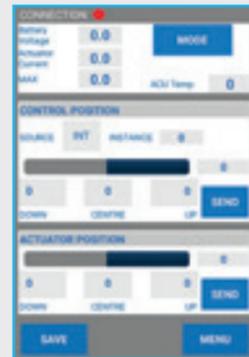

- X1
- OVDC
 - +12VDC
 - Actuator neg
 - Actuator pos

- X2
- Pot. 1 GND
 - Pot. 1 signal
 - Pot. 1 +5VDC
 - CAN-L
 - CAN-H
 - Alarm
 - Actuator pot GND
 - Actuator pot signal
 - Actuator pot +5V
 - Pot. 2 GND
 - Pot. 2 signal
 - Pot. 2 +5VDC

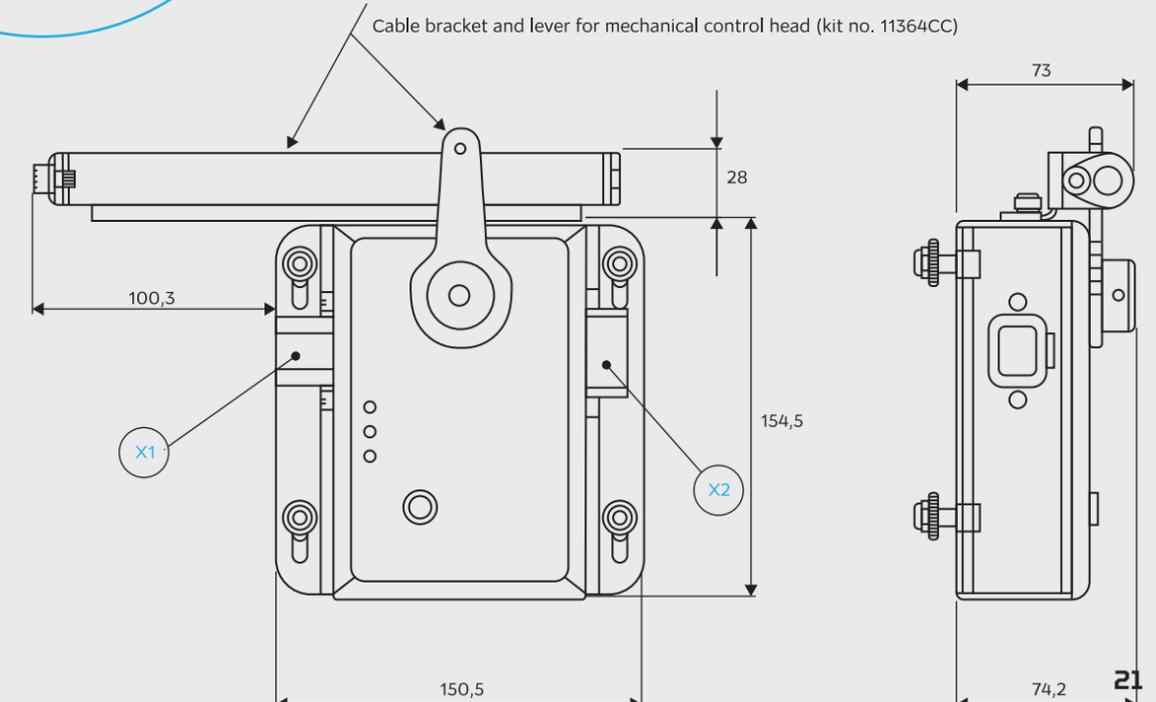

AJ SIGMA CONTROLS

AND INTELLIGENT DYNAMICS


Alamarin-Jet SIGMA Control is an electro-hydraulic integrated drive-by-wire control system. It supports installations from single to quadruple waterjets.

The system is based on modular architecture and the level of features depends on the modules integrated based on the user requirements.

In addition to the standard configuration of Sigma Controls, AJ Intelligent Dynamics is also available as an add-on feature. AJ Intelligent Dynamics has been developed with future markets and industries at its core, such as effortless and straightforward integration with 3rd party autonomous and unmanned systems. Intelligent Dynamics also features highly sophisticated position and heading keeping functions which give significant operational benefits to a wide

INTELLIGENT DYNAMICS IS THE GROUP OF FEATURES INCLUDING:

- | Intelligent Position Hold (DPS)
- | Intelligent Vessel Anchor (ANC)
- | Intelligent Heading Keeping (HDG)

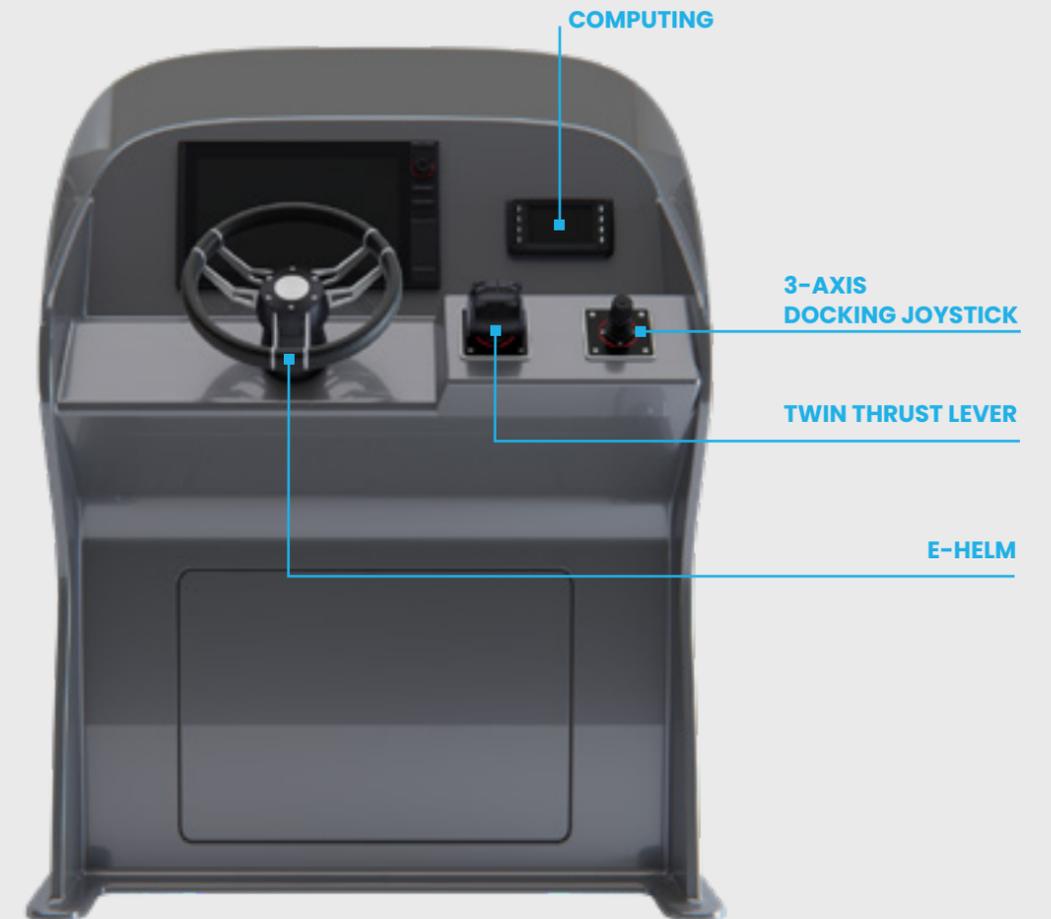

TECHNICAL:

The SIGMA Control system is built on a CAN network, the core of the system being the Jet Controller Units (JCU) and Helm Control Units (HCU) being connected via a standardised cable system. Each Jet has its own independent JCU and individual control hydraulics for increased redundancy. Each JCU works also as an individual control network node (CAN Bus). The primary BUS system is capable to carry both, electric power for each JCU node and network communications.

In the case of twin installation and upwards, two electrically separated primary BUS lines are used to increase the redundancy level. All primary control heads are capable to deliver isolated dual output. Each Control Head axis of movement has two electronically separated circuits, making each propulsion line truly separated and independent. Any single point of failure does not affect to another Primary BUS propulsion line.

Modular and scalable architecture – From single installation up to quad installation

Multiple control stations

Multiple control head arrangement options

Flexible BUS architecture – each jet unit acts as an individual BUS

Factory made modular cabling system, no custom cables required

Easy to approach design

Installation is based on plug'n'play modules

Intuitive walk through commissioning procedure

Simple to use, new High Resolution display with modern UI/UX usability

Digital engine interface – Direct digital CAN-CAN Throttle control

Sophisticated diagnostics – Multiple data logging and diagnostics

Intelligent self-monitoring system. Temperature, Pressure and Fluid

USV Ready – Comprehensive low-level (CAN) and high-level (IP) interfaces



Alamarin-Jet Oy
Tuomistentie 16, FI-62300 Härmä, Finland

www.alamarinjet.com